


Features

Under **MyOtr** and through login and password can access their pages, the system allows a number of operations such as:


- Display of charts and graphs in real time of the monitored parameters in differential mode and with the opportunity to choose either the sensors both time intervals
- Display the position of the sensors in or on planimetric diagrams of images with the ability to highlight the value measured in real-time
- View diagrams of the monitoring system implemented
- Save the real-time graphics in jpg format and send them via e-mail
- Data export natural and processed on spreadsheets
- Indication of battery status of the datalogger
- Signal transmission failure
- Can be used with Datalogger via GPRS module
- Can be used also by Datalogger with satellite system Iridium SBD (otrservice)
- Set alert thresholds and alarm for each sensor to the overcoming of which the system sends SMS to predefined numbers.



MyOtr – Railway deformation monitoring system

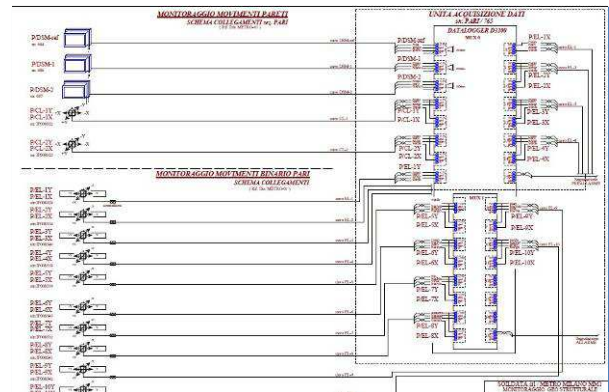

MyOtr – System diagram

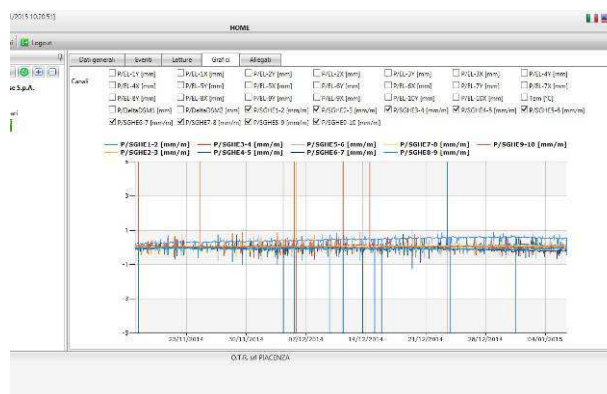

MyOtr – Example of automatic data processing

Sections can be developed on request.

All product technical specifications are subject to change without notice.